

FIG. 1
(PRIOR ART)

FIG. 2 is a block diagram of a system 100 for requesting data from edge servers. The system 100 includes a requesting system 102, an operations center 200, and a plurality of edge servers 204A, 204B, 204i, and 204n. The requesting system 102 sends an address 208 to the operations center 200. The operations center 200 then sends a request to the edge servers 204A, 204B, 204i, and 204n to retrieve requested data 206A, 206B, 206i, and 206n, respectively. The edge servers 204A, 204B, 204i, and 204n are connected to the requesting system 102 via a network.

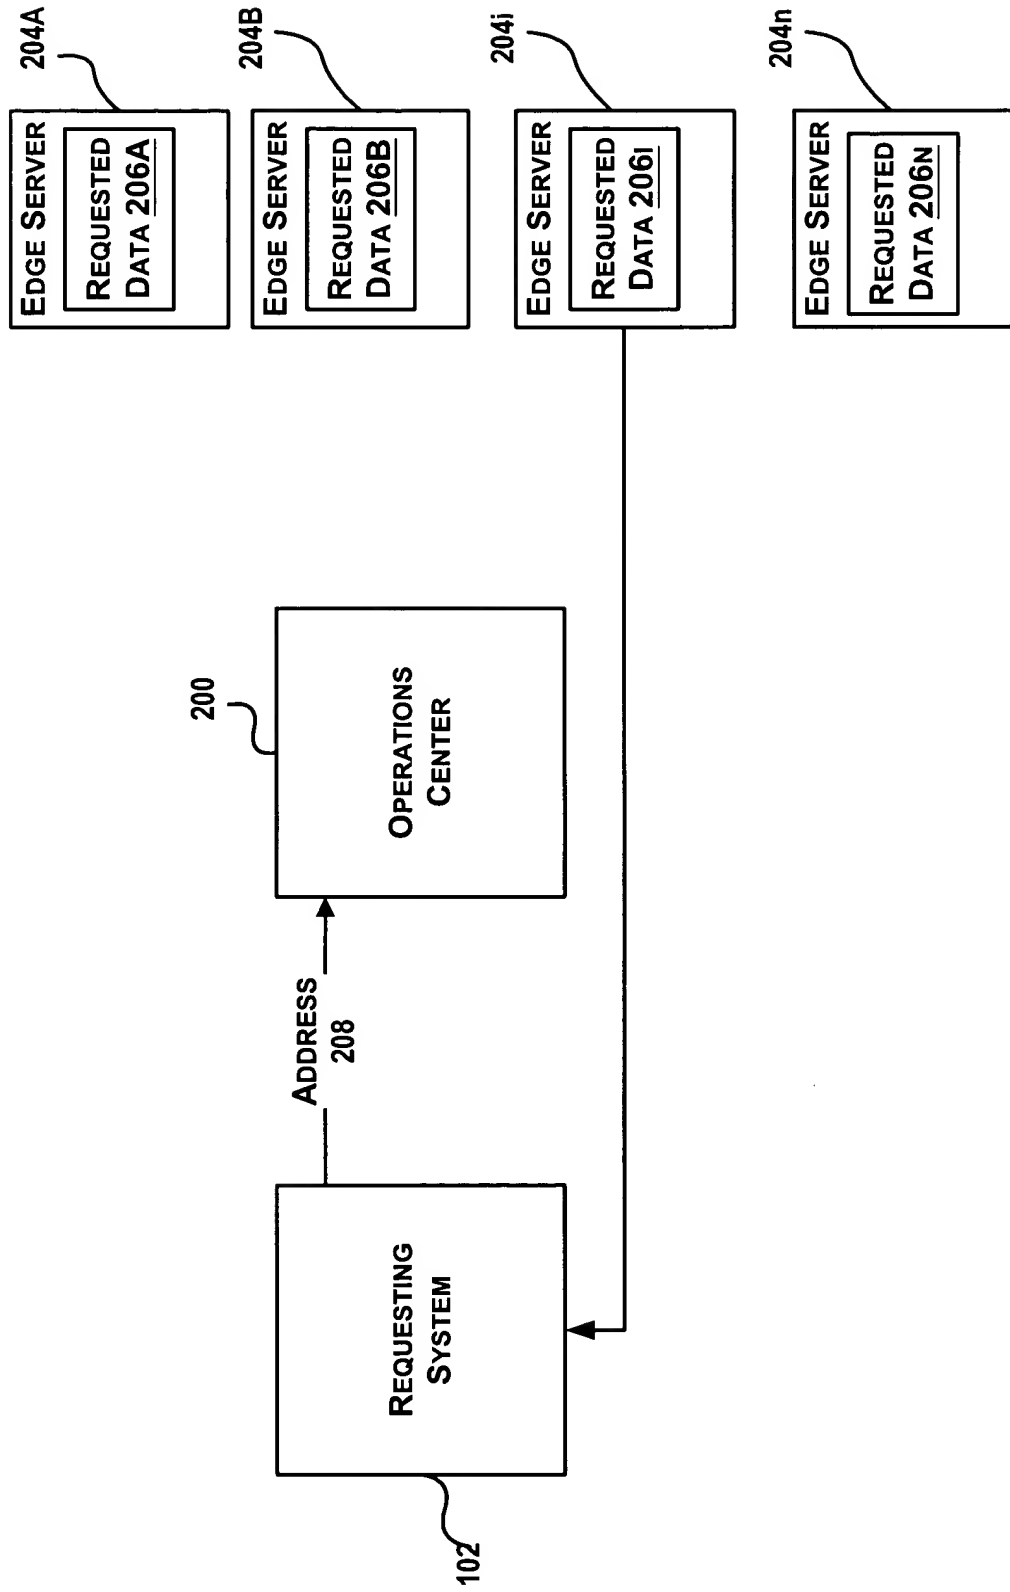


FIG. 2

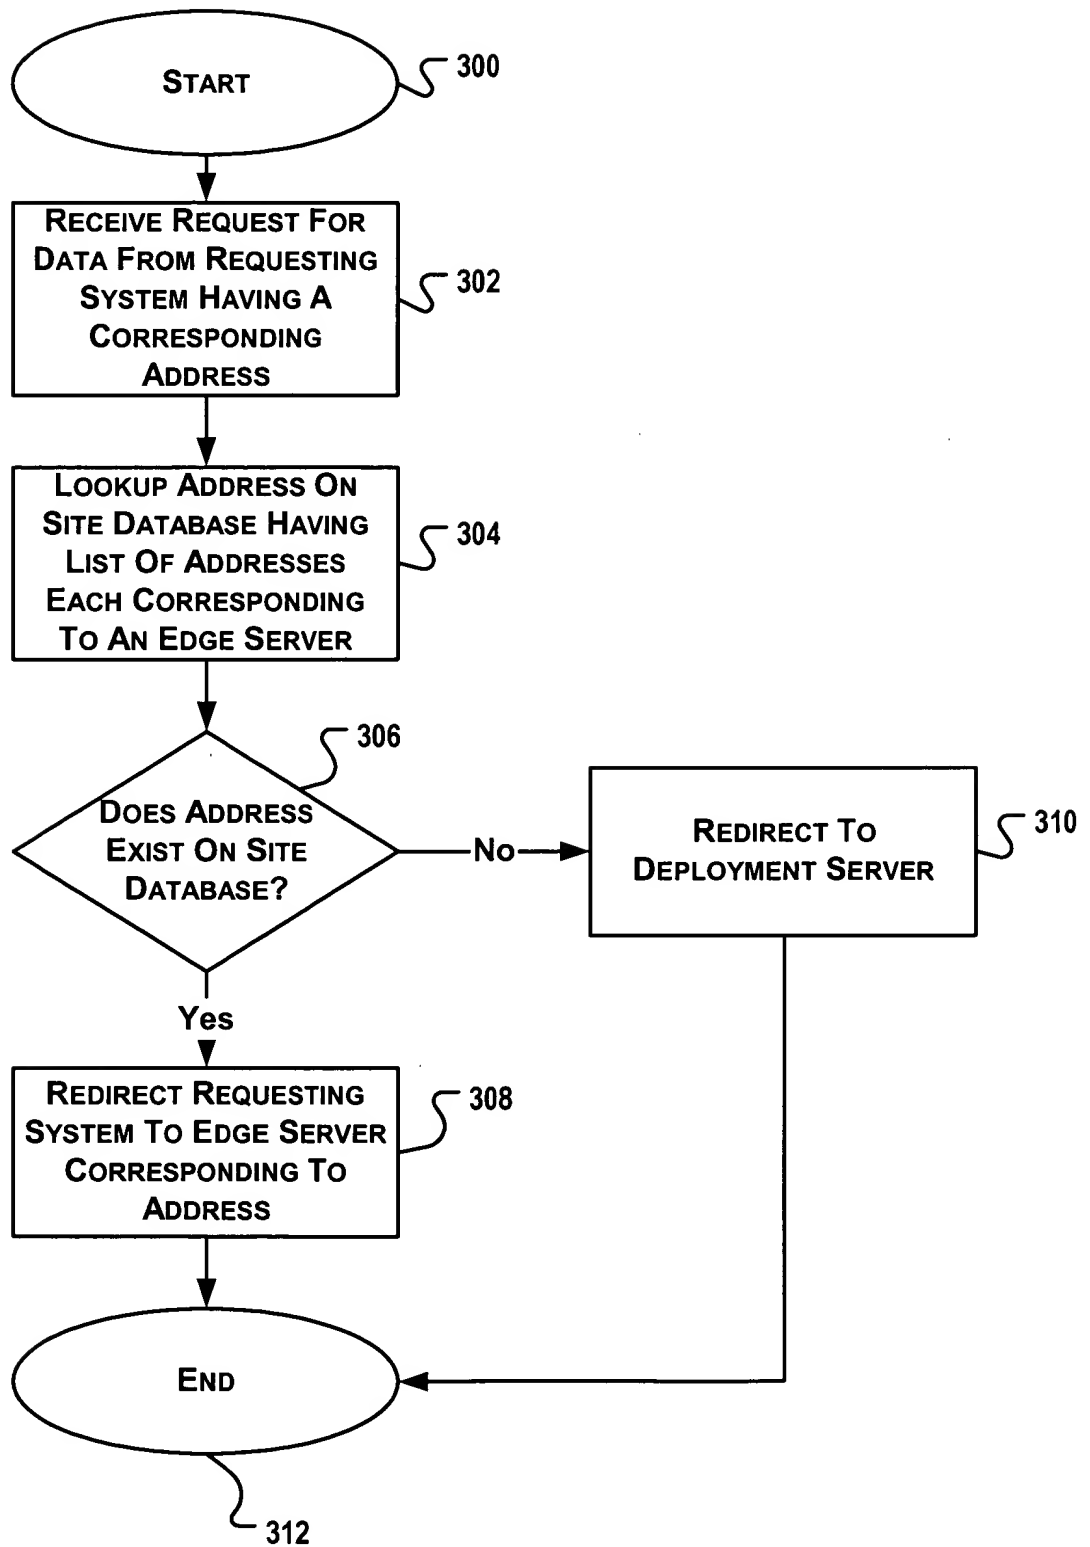


FIG. 3

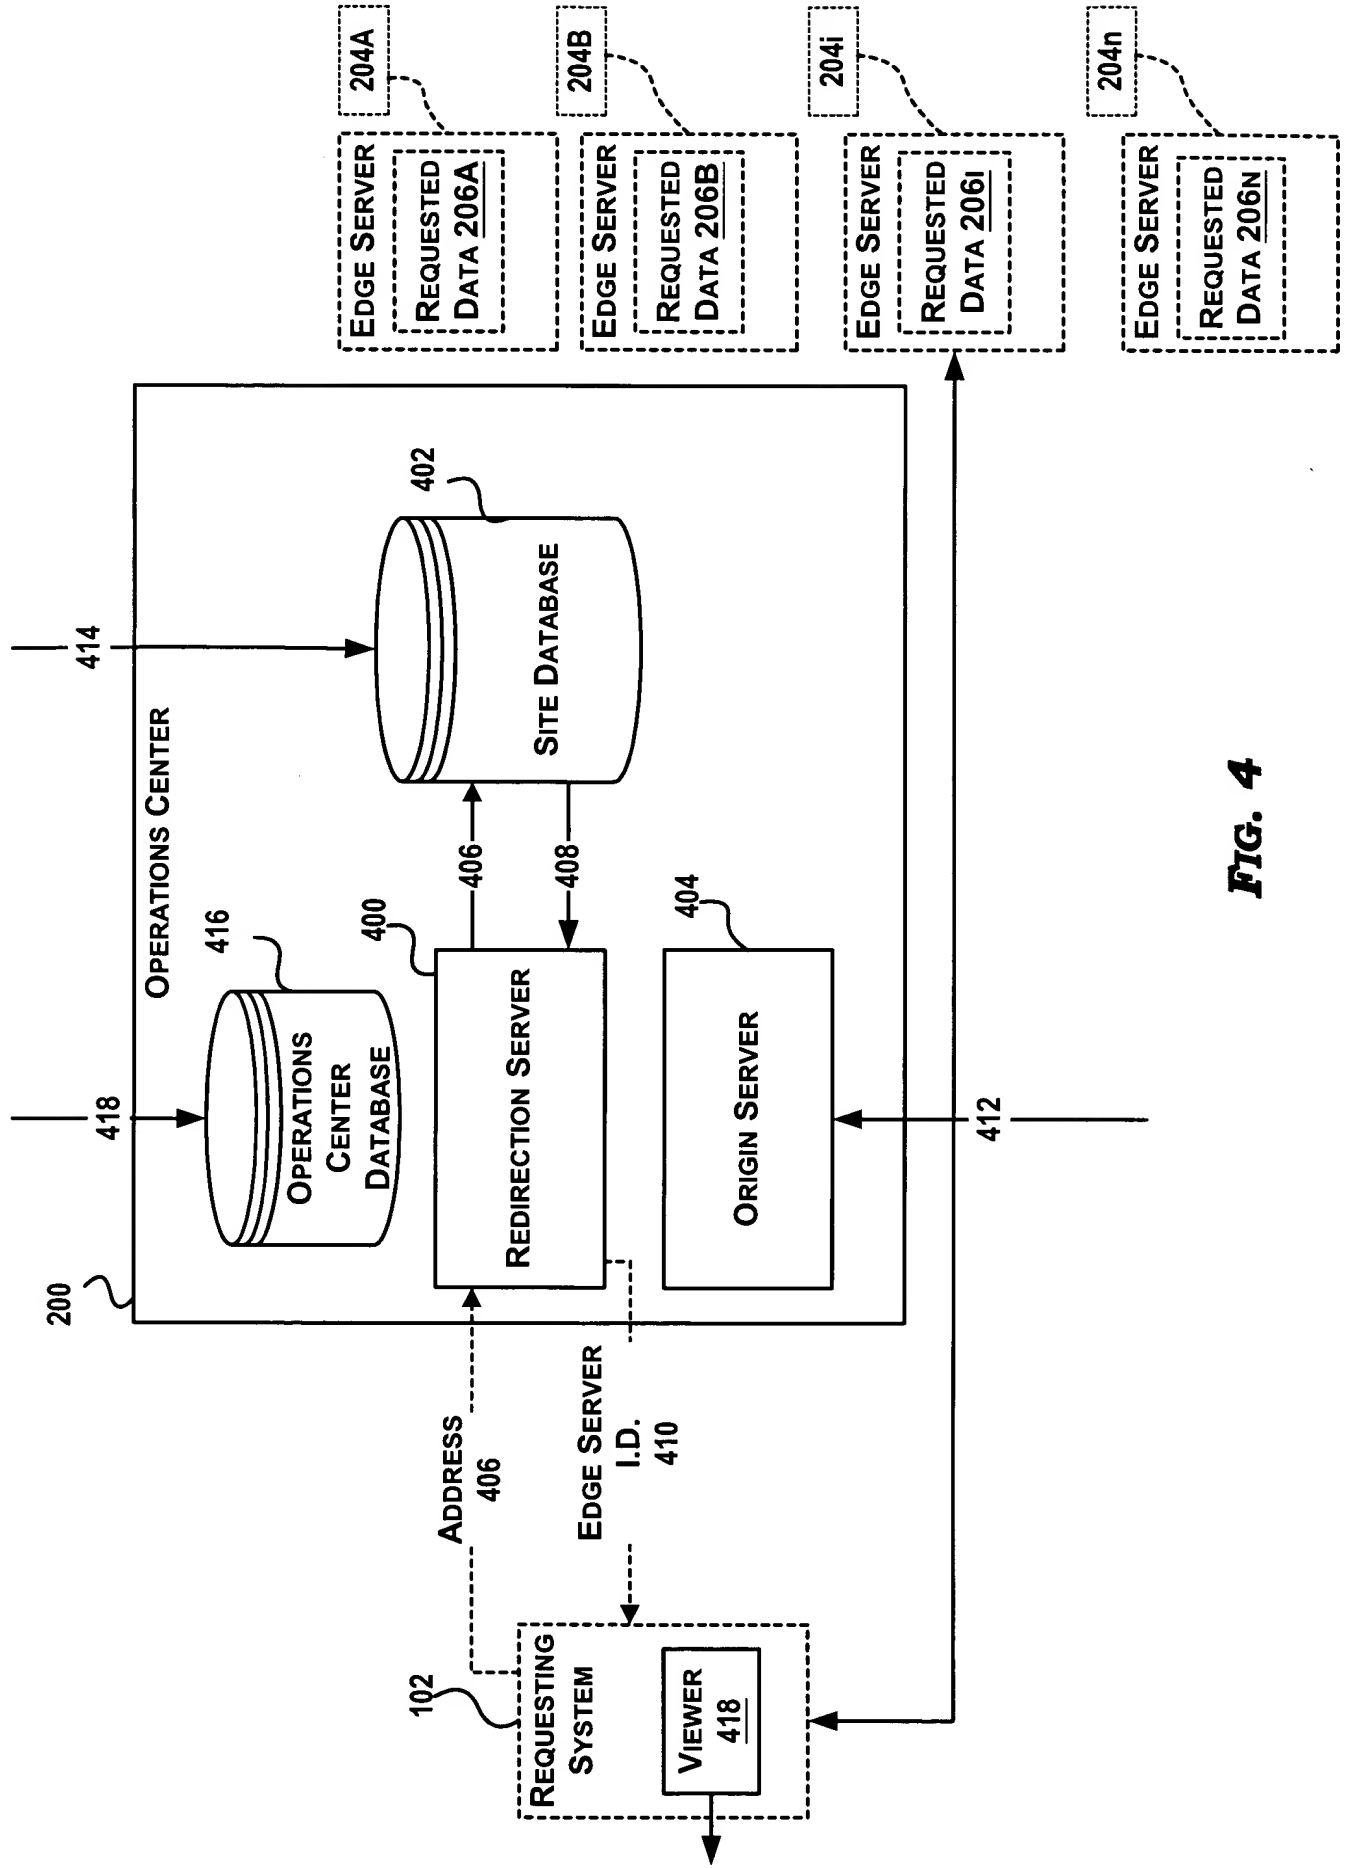


FIG. 4